

APPLICATION NOTE

APNUS034How To Setup your Cellular Router

November 2023

Content

1.	Glossary	3
2.	Introduction.....	3
3.	Setting up your Cellular router.....	3
3.1	SIM installation General best practices	4
3.1.1	Format of SIM card.....	4
3.1.2	SIM card insertion on AirWan, AirBox	5
3.1.3	SIM card insertion on RailBox Cellular Series	6
3.2	GNSS and Cellular Antennas installation	7
3.3	Installation Overview and Prerequisites	7
3.4	Configuring your internet service provider settings	7
4.	STATUS	10
	WAN Router Cellular: Status.....	10
	WAN Router: Network Status.....	10
	WAN Router: Network Testing	10

1. Glossary

APN : Access Point Network

ISP : Internet Service Provider

GUI : Graphic User Interface

SIM: Subscriber Identify Module

RSSI : Received Signal Strength Indicator

GNSS:Global Navigation Satellite System

ICMP: Internet Control Management Protocol

LTE: Long Term Evolution**TCP**: Transmission Control Protocol

BER: Bit Error Rate estimator

ARFCN: Absolute Radio Frequency Channel Number

LAC/CID: Base station Local Area Code and Cellular cell ID.

MCC/MNC: Mobile Country Code / Mobile Network Code

IPv4: Internet Protocol Version 4

IPv6: Internet Protocol Version 6

2. Introduction

This application note provides a full description on how to install and setup your Acksys Cellular Router:

- Installing the SIM card
- Installing the cellular and GNSS antennas
- Configuring your internet service provider settings to get internet access

3. Setting up your Cellular router

Follow the steps below to get your Acksys Cellular SIM + Device up and running.

There are different types of 4G/5G LTE Cellular Routers that serve various business needs including wired and wireless routers with different method to insert SIM card.

3.1 SIM installation General best practices

To connect your SIM card to the cellular router, in most of cases, follow these step-by-step instructions:

1. **Check compatibility:** Ensure that your SIM card is compatible with the router's supported networks (e.g., 2G, 3G, 4G, or 5G) and SIM card slots
2. **Power off the router:** Turn off the Cellular router and disconnect it from the power source to avoid any electrical damage during setup
3. **Locate the SIM card slot:** Look for the SIM card slot on the router. It is usually located on the back or bottom of the device. Refer to the router's user manual
4. **Insert the SIM card:** Gently insert the SIM card into the SIM card slot, following the correct orientation as indicated by the router. Be careful not to force it or insert it incorrectly to prevent damage.
5. **Power on the router:** Connect it back to the power source and turn it on. Wait for the router to boot up completely. The router should recognize the SIM card and establish a network connection automatically (in case of Auto APN + default pin code = 0000, otherwise you have to configure your APN + pin code).
6. **Configure network settings:** Access the router's administration interface by entering its IP address in a web browser. The default IP address and login credentials are usually mentioned in the user manual or labeled on the router.
7. **Configure APN settings:** In the router's administration interface, navigate to the Network or SIM settings section. You may need to enter the Access Point Name (APN) provided by your network carrier. The APN information can typically be obtained from the carrier's website or by contacting their customer support.
8. **Save and apply settings:** After entering the correct APN settings, save and apply the router's administration interface changes. The router will then attempt to establish a cellular connection using the SIM card
9. **Connect devices to the router:** Once the router establishes a cellular connection, you can connect your devices (such as smartphones, tablets, or computers) to the router's network (in case of Wi-Fi AP configured on your router). Look for the network name (SSID) and password, usually mentioned on the router or in its user manual
10. **Test the connection:** Verify that the devices connected to the router can access the internet by opening a web browser or using any online application. If everything is set up correctly, you should have an active internet connection through the SIM card.

3.1.1 Format of SIM card

Acksys Cellular routers are compatible and support two SIM card families formats as described in bellow table:

	RailBox Cellular Router Series	AirBox, AirWan , EmbedAir Router
Format of SIM card	Micro-SIM (3FF) cards	Nano-SIM (4FF)

NOTE: Nano-SIM (4FF) cards can be used with a 3FF SIM card adapter as shown on the bellow figure:




3.1.2 SIM card insertion on AirWan, AirBox

We advise our customers to power off the router before inserting the SIM card, otherwise it is totally fine inserting and removing SIM cards while the router is in a working state, but you will have to restart the cellular router for SIM card detection.

- AirBox Cellular Router is a product designed to accept 2 SIM cards in Nano-SIM format (the smallest format) .
- AirWan Router has 1 SIM Card .

We invite our customer to double check the compatibility of their SIM card and follow these steps below:

- 1 Push the SIM holder button with the SIM needle.
- 2 Pull out the SIM holder.
- 3 Insert your SIM card into the SIM holder (check the SIM card orientation before).
- 4 Slide the SIM holder back into the router.

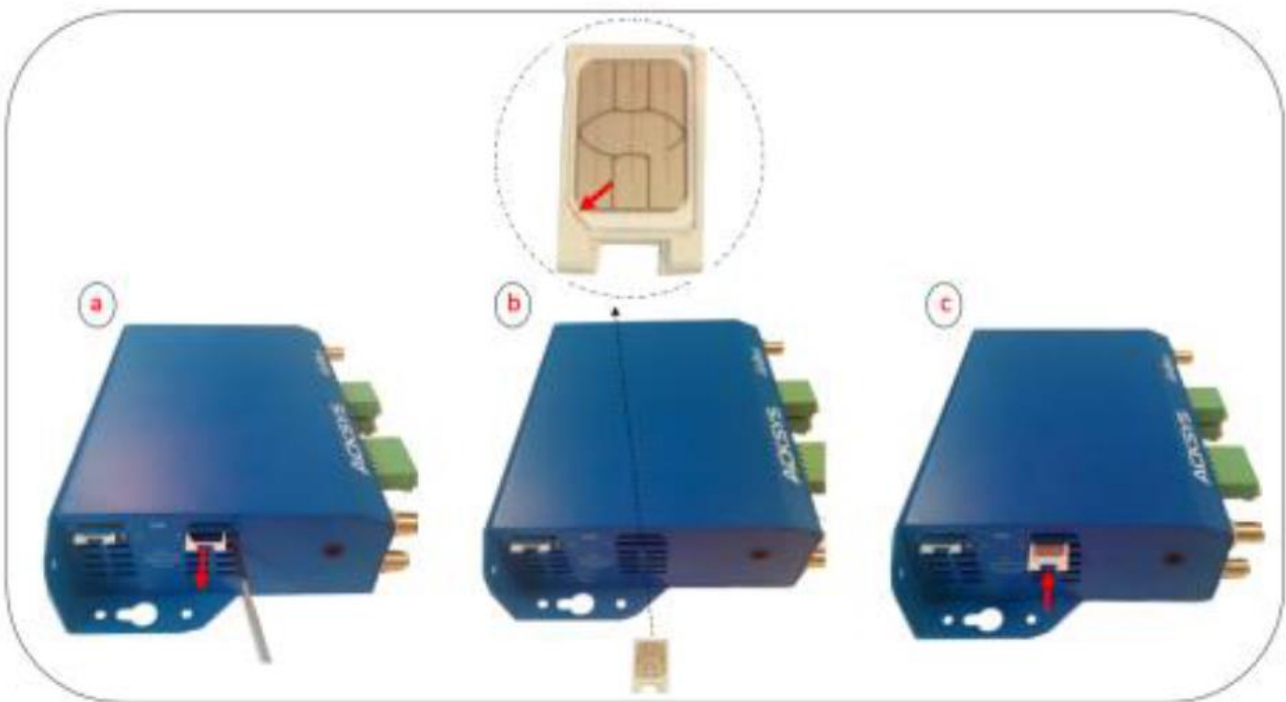

NOTE: Inserting SIM Card on AirBox is look similar except the SIM holder is located back to the router



3.1.3 SIM card insertion on RailBox Cellular Series

RailBox Cellular Series are routers designed to accept 2 SIM cards in Micro SIM format. Please check the compatibility of your SIM card and follow these steps below:

1. Power Off the Router by unplugging the power Supply.
2. If necessary, move the product in a safe area free from dust and water
3. Unscrew the top 4 screws of the box and remove the cover (2Nm +/-10%) with « in a criss-cross pattern »
4. Locate the two flat Micro SIM slots near the lights for WiFi 1 (border side)
5. Choose one slot; they are labelled on one side (near the center of the device PCB)
6. To open the slot: make the slot cover slide by pushing it gently towards the border side
7. Now the cover can be lifted from the center side, around the axle which is at the border side
8. Place the Micro SIM card, gold contacts facing down, cut corner towards the border side
9. Lower back the slot cover and push it towards the SIM slot label, you should hear a faint click
10. Put back the cover in place and tight the 4 screws in a criss-cross pattern to a torque of 2Nm \pm 10%



3.2 GNSS and Cellular Antennas installation

Acksys Cellular routers are compatible with a wide range of Antennas with the requirement described in bellow table:

Items	RailBox Cellular Router Series	AirBox, AirWan Router
LTE	3 x QMA*	2 x SMA female
GNSS	1 x QMA	1 x SMA female

Example of 3 Cellular Router Antenna Installation: AirWan, RailBox and AirBox.

Please check that the antenna support the frequency band that you want to tune on.

For passive or active GNSS antenna requirements, please refer to the datasheet of the router.



3.3 Installation Overview and Prerequisites

Before we begin, let's overview the configuration that we are attempting to achieve and the prerequisites that make it possible in this application note :

- 1 Acksys Cellular router (AirBox) or any type of Acksys Cellular Router with 1 SIM Card slot
- Any release for WaveOs
- A valid SIM card from a known ISP
- SIM needle
- 1 screwdriver
- Laptop to configure the router


3.4 Configuring your internet service provider settings

The Cellular Radio interface is disabled by default. It is an IP-only interface except in WaveOs release 4.22.0.1 with the AutoAPN feature (with cellular radio is active).

Configuring WAN Interface

If you have familiarized yourself with the configuration scheme, we can start configuring the router using instructions provided in this section:

In GUI, go to Setup → Physical Interfaces → Enable the WAN Interface.

WAN INTERFACE		
	3G/4G/LTE Cellular radio (Cellular)	
	FRIENDLY NAME	ACTIONS
	Cellular	Interface disabled

- Click the "Edit" button located to the right and configure WAN Interface.
 - General Setup
 - Select IPv4 in IP family (please check that your ISP supports IPv4 otherwise select IPv6)
 - Check Replace default route (to use ISP network as default gateway/route)
 - Set 0 as routing metric 0 for default gateway
 - Check Use peer DNS in case DNS is on the LAN to use the ISP DNS
 - Save

WAN SETTINGS - CELLULAR

On this page you can configure a WAN interface.

CELLULAR	
General Setup	SIM 1 SIM 2 Advanced Settings
Network description	LTE
Default SIM card	<input checked="" type="radio"/> SIM 1 <input type="radio"/> SIM 2 <small>SIM slot selected at startup</small>
IP Family	IPv4
Protocol	Wireless wide area network
Replace default route	<input checked="" type="checkbox"/> Replace the default route to use the cellular interface after successful connect
Default gateway metric	0
Use peer DNS	<input checked="" type="checkbox"/> Configure the local DNS server to use the name servers advertised by the cellular peer

- Select the correct SIM slot (in case of dual SIM) and fill out APN with the connection information provided by the ISP (in this case sfr SIM card is used): sl2sfr

SETUP	TOOLS	STATUS
WAN SETTINGS - LTE On this page you can configure a WAN interface.		
CELLULAR		
General Setup SIM 1 SIM 2 Advanced Settings		
SIM card 1 PIN code		<input type="password"/> <small>Enter the correct SLOT 1 PIN code or you might lock your sim card!</small>
SIM card 1 access point (APN)		<input type="text" value="sl2sfr"/> <small>Required except for LTE-only connections</small>
Authentication protocol		<input type="text" value="SIM only"/>

In case of WaveOs release 4.22.0 with AutoAPN features, no need to configure the APN Setting.

- SIM1
 - SIM card 1 PIN code: Your custom PIN code to avoid the SIM lock
 - Auto APN: Enable APN inferred from SIM card data (**Enabled by default**)
 - Auto found APN (): N/A until we have save and apply the configuration. Then it will automatically select the APN found in the database for this simcard.
 - Authentication protocol: SIM only

WAN SETTINGS - CELLULAR

On this page you can configure a WAN interface.

CELLULAR	
General Setup	SIM 1 SIM 2 Advanced Settings
SIM card 1 PIN code	<input type="password"/> Enter the correct SLOT 1 PIN code or you might lock your sim card!
Auto APN	<input checked="" type="checkbox"/> APN inferred from SIM card data
Auto found APN	N/A
Authentication protocol	SIM only

- Advanced Setting (Check if the predefined configuration suite your use case)
- Enable AT transactions logs for better understanding in troubleshoot in case of issue.
- Save and apply the config

SETUP	TOOLS	STATUS										
<h3>WAN SETTINGS - LTE</h3> <p>On this page you can configure a WAN interface.</p> <table border="1"> <thead> <tr> <th colspan="2">CELLULAR</th> </tr> </thead> <tbody> <tr> <td>General Setup</td> <td>SIM 1 Advanced Settings</td> </tr> <tr> <td>Always disabled at startup</td> <td><input type="checkbox"/></td> </tr> <tr> <td>State at startup</td> <td>Default <small>Default is 'up' except for networks with protocol 'none'. Use 'down' if this network should be brought up only by event rules.</small></td> </tr> <tr> <td>Log AT transactions at "debug" level</td> <td><input checked="" type="checkbox"/> <small>Use only at Support Service request, since it can flood the system log</small></td> </tr> </tbody> </table>			CELLULAR		General Setup	SIM 1 Advanced Settings	Always disabled at startup	<input type="checkbox"/>	State at startup	Default <small>Default is 'up' except for networks with protocol 'none'. Use 'down' if this network should be brought up only by event rules.</small>	Log AT transactions at "debug" level	<input checked="" type="checkbox"/> <small>Use only at Support Service request, since it can flood the system log</small>
CELLULAR												
General Setup	SIM 1 Advanced Settings											
Always disabled at startup	<input type="checkbox"/>											
State at startup	Default <small>Default is 'up' except for networks with protocol 'none'. Use 'down' if this network should be brought up only by event rules.</small>											
Log AT transactions at "debug" level	<input checked="" type="checkbox"/> <small>Use only at Support Service request, since it can flood the system log</small>											

- Save the config

Go in Tools Logs Setting→ Cellular → Log Setting (for troubleshooting purpose)

CELLULAR LOG SETTINGS (CELLULAR)	
Log level	Debug

- Save and apply the config

4. STATUS

If you've followed up all the steps presented above, your configuration should be finished and let have an overview on status of your Cellular connection:

WAN Router Cellular: Status

In GUI and go to **Status → Cellular**

CELLULAR STATUS								
Warning: scanning will break established connections which use that radio.								
Cellular interfaces								
RADIO	MODEM INFORMATION	ATTACHED	OPERATOR MCG/MNC	BASE STATION LAC/CID	ACCESS TECHNOLOGY	INFRASTRUCTURE BAND CHANNELS	RSSI	BER
Cellular	Password accepted IMSI: 208101188844640 IMEI: 066758042299632 model: EC25 rev A0.3 EMEA band: L1EFD: B1/B3/B5/B7/B8/B20 L1ETDD: B38/B40/B41 WCDMA: B1/B5/B8 GSM: B3/B8	home	F SFR 208/10	46506 / 159942403	gsm FDD LTE	LTE LTE BAND 3 ARF-CN: 1501	-67	0
								Scan

WAN Router: Network Status

To verify the connection, click in Status>Network as shown in the screenshot below where the WAN interface received Internet IP address.

In GUI and go to **Status → Network**

LTE						
IP CONFIGURATION						
IPv4 Stack						
IPv4: 100.104.166.203 Netmask: 29 MTU: 1500						
IPv6 Stack						
IPv6: fe80::8143:169f:14e2:308a Netmask: 64 Scope: link						
DHCP info: Lease time: 7200s						
DNS server: 172.20.2.39 172.20.2.10						
GRAPH	PHYSICAL INTERFACE	MAC ADDRESS	TX COUNT (IN BYTES)	RX COUNT (IN BYTES)	INTERFACE MODE	MTU
	Cellular	00:00:00:00:00:00	23039	44147	Operator (home): F SFR SIM: Password accepted	1500

WAN Router: Network Testing

we do network connectivity test with ping on google DNS works with success as shown the screenshot below:

8.8.8.8

www.example.com

Ping

Ping IPv6

Traceroute

Traceroute IPv6

MODE

PROTOCOL

DELAY (S)

DISPLAY (S)

Server

TCP

Run Test

www.example.com

A

Query

PING 8.8.8.8 (8.8.8.8): 56 data bytes
 64 bytes from 8.8.8.8: seq=0 ttl=114 time=30.230 ms
 64 bytes from 8.8.8.8: seq=1 ttl=114 time=40.745 ms
 64 bytes from 8.8.8.8: seq=2 ttl=114 time=39.674 ms
 64 bytes from 8.8.8.8: seq=3 ttl=114 time=28.521 ms
 64 bytes from 8.8.8.8: seq=4 ttl=114 time=36.716 ms
 --- 8.8.8.8 ping statistics ---
 5 packets transmitted, 5 packets received, 0% packet loss
 round-trip min/avg/max = 28.521/35.977/48.745 ms

Support : <https://support.acksys.fr>